


THICK FILM CHIP RESISTORS ARRAYS
CPA044 (0402 8P4R CONVEX TYPE)
CPA064 (0603 8P4R CONVEX TYPE)

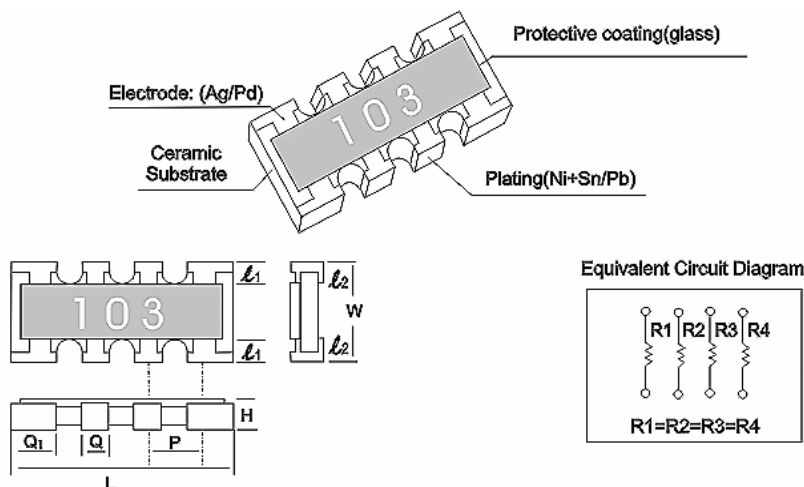

Dimensions (mm)

Type	L	W	H	l1	l2	P	Q	Q1
CPA044	2.00±0.10	1.00±0.10	0.40±0.10	0.20±0.10	0.20±0.10	0.50±0.10	0.30±0.10	0.43±0.10
CPA064	3.20±0.20	1.60±0.15	0.50±0.10	0.30±0.20	0.30±0.20	0.80±0.20	0.50±0.10	0.61±0.10

General Specifications

Type	Power Rating at 70°C	Rate Current of Jumper(A)	Max Working Voltage(Vw)	Max Overload Voltage(Vo)	TCR (PPM/°C)	Resistance Tolerance (%)	Resistance Range (Ω)	Operating Temperature (°C)
CPA044	0.063W	1A	25V	50V	±200	Jumper	Below 50m	-55°C~+125°C
						±1%	10R-1M	
						±5%	10R-1M	
CPA064	0.1W	1A	50V	100V	±200	Jumper	Below 50m	-55°C~+125°C
						±1%	10R-1M	
						±5%	10R-1M	

Ordering Information

Type	Tolerance	Resistance Value	Packaging	Special Request (Optional)
CPA044 CPA064	F (1%) J (5%)	10K	TR (Tape/Reel)	LV (Low value)

Sep. 12, 2001