

## Marketing Bulletin

**DATE:** January 28<sup>th</sup>, 2008  
**TO:** All Sales Personnel  
**FROM:** Isaac Gonzalez  
**RE:** Product Termination

To all concerned parties,


This bulletin is to notify all customers of the discontinuation of the following Ecliptek series effective January 28<sup>th</sup>, 2008:

<b>Series</b>	<b>Description</b>	<b>Recommended Replacement</b>
EC3	Resistance Welded HC-49/UST Crystal	E2S

In compliance with our End of Life (EOL) policy, this will serve as advanced notice of product termination. New orders will not be accepted after July 28<sup>th</sup>, 2008, with delivery to conclude by October 28<sup>th</sup>, 2008.

If there are any questions pertaining to this bulletin, please feel free to contact me. Thank you again for your cooperation.


Best Regards,



Isaac Gonzalez  
Configuration Manager  
Ecliptek Corporation

# EC3 Series

- HC-49/UST package
- AT or BT cut available
- Resistance weld seal
- Tight tolerance/stability
- Insulator tab, and custom lead length options available

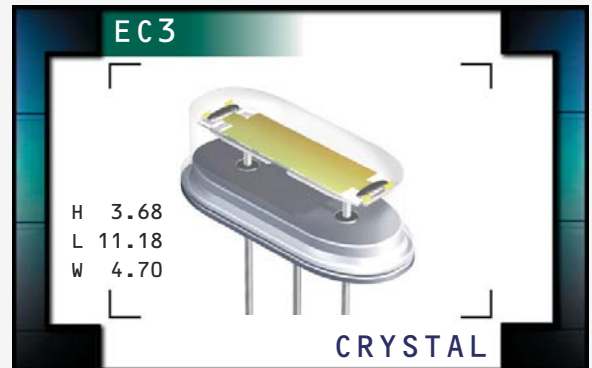

## NOTES

**OBSOLETE**

### ELECTRICAL SPECIFICATIONS

Frequency Range	3.579545MHz to 50.000MHz
Frequency Tolerance / Stability	±50ppm / ±100ppm (Standard), ±30ppm / ±50ppm (AT cut only), ±15ppm / ±30ppm (AT cut only),
Over Operating Temperature Range	±15ppm / ±20ppm (AT cut only), or ±10ppm / ±15ppm (AT cut only)
Operating Temperature Range	0°C to 70°C (Standard), -20°C to 70°C (AT cut only), or -40°C to 85°C (AT cut only)
Aging (at 25°C)	±5ppm / year Maximum
Storage Temperature Range	-40°C to 85°C
Shunt Capacitance	7pF Maximum
Insulation Resistance	500 Megaohms Minimum at 100V <sub>DC</sub>
Drive Level	1 mWatt Maximum
Load Capacitance (C <sub>L</sub> )	18pF (Standard), Custom C <sub>L</sub> ≥10pF, or Series Resonant

### EQUIVALENT SERIES RESISTANCE (ESR), MODE OF OPERATION (MODE), AND CUT

Frequency Range	ESR (Ω)	Mode / Cut	Frequency Range	ESR (Ω)	Mode / Cut
3.579545MHz to 4.999MHz	200 Max	Fundamental / AT	15.000MHz to 15.999MHz	60 Max	Fundamental / AT
5.000MHz to 5.999MHz	150 Max	Fundamental / AT	16.000MHz to 23.999MHz	50 Max	Fundamental / AT
6.000MHz to 7.999MHz	120 Max	Fundamental / AT	24.000MHz to 29.4912MHz	40 Max	Fundamental / AT
8.000MHz to 8.999MHz	90 Max	Fundamental / AT	24.000MHz to 40.000MHz	40 Max	Fundamental / BT
9.000MHz to 9.999MHz	80 Max	Fundamental / AT	28.6363MHz to 29.999MHz	150 Max	Third Overtone / AT
10.000MHz to 14.999MHz	70 Max	Fundamental / AT	30.000MHz to 50.000MHz	100 Max	Third Overtone / AT

## PART NUMBERING GUIDE

**EC3 A - T - 20 - 30.000M - I2**

### FREQUENCY TOLERANCE / STABILITY

Blank=±50ppm at 25°C, ±100ppm from 0°C to 70°C  
 A=±50ppm at 25°C, ±100ppm from -20°C to 70°C  
 B=±50ppm at 25°C, ±100ppm from -40°C to 85°C  
 C=±30ppm at 25°C, ±50ppm from 0°C to 70°C  
 D=±30ppm at 25°C, ±50ppm from -20°C to 70°C  
 E=±30ppm at 25°C, ±50ppm from -40°C to 85°C  
 F=±15ppm at 25°C, ±30ppm from 0°C to 70°C  
 G=±15ppm at 25°C, ±30ppm from -20°C to 70°C  
 H=±15ppm at 25°C, ±30ppm from -40°C to 85°C  
 J=±15ppm at 25°C, ±20ppm from 0°C to 70°C  
 K=±15ppm at 25°C, ±20ppm from -20°C to 70°C  
 L=±15ppm at 25°C, ±20ppm from -40°C to 85°C  
 M=±10ppm at 25°C, ±15ppm from 0°C to 70°C  
 N=±10ppm at 25°C, ±15ppm from -20°C to 70°C

### AVAILABLE OPTIONS

Blank=None (Std)  
 CL150=Custom Lead Length (See Page 42)  
 CL175=Custom Lead Length (See Page 42)  
 I2=Insulator Tab (See Page 42)

### FREQUENCY

### LOAD CAPACITANCE

Blank=18pF (Standard), S=Series  
 XX=XXpF (Custom)


### MODE OF OPERATION / CRYSTAL CUT

Blank=Fundamental / AT, B=Fundamental / BT  
 T=Third Overtone / AT

## NOTES

**OBSOLETE**

### MECHANICAL DIMENSIONS ALL DIMENSIONS IN MILLIMETERS

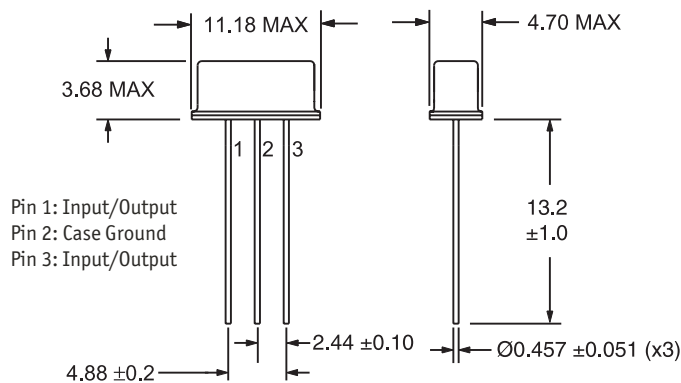

### ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

PARAMETER	SPECIFICATION
Fine Leak Test	MIL-STD-883, Method 1014, Condition A
Gross Leak Test	MIL-STD-883, Method 1014, Condition C
Mechanical Shock	MIL-STD-202, Method 213, Condition C
Vibration	MIL-STD-883, Method 2007, Condition A
Lead Integrity	MIL-STD-883, Method 2004
Solderability	MIL-STD-883, Method 2002
Temperature Cycling	MIL-STD-883, Method 1010
Resistance to Soldering Heat	MIL-STD-202, Method 210
Resistance to Solvents	MIL-STD-202, Method 215

### MARKING SPECIFICATIONS

Line 1: E XX.XXX M  
 M or Blank (No Marking)  
 Frequency in MHz  
 (5 Digits Maximum + Decimal)

MANUFACTURER  
 ECLIPTEK CORP.

CATEGORY  
 CRYSTAL

SERIES  
 EC3

PACKAGE  
 HC-49/UST

CLASS  
 CR37

REV. DATE  
 01/06