

# Light Emitting Diodes

High Power LEDs

ADLHP Series




ADLHP0-83000-M1-L

WHITE

## INTRODUCTION

The Adiva High-Power LED has a wide range of applications and a uniquely designed shape and is encapsulated in water clear epoxy resin with an 8mm diameter.

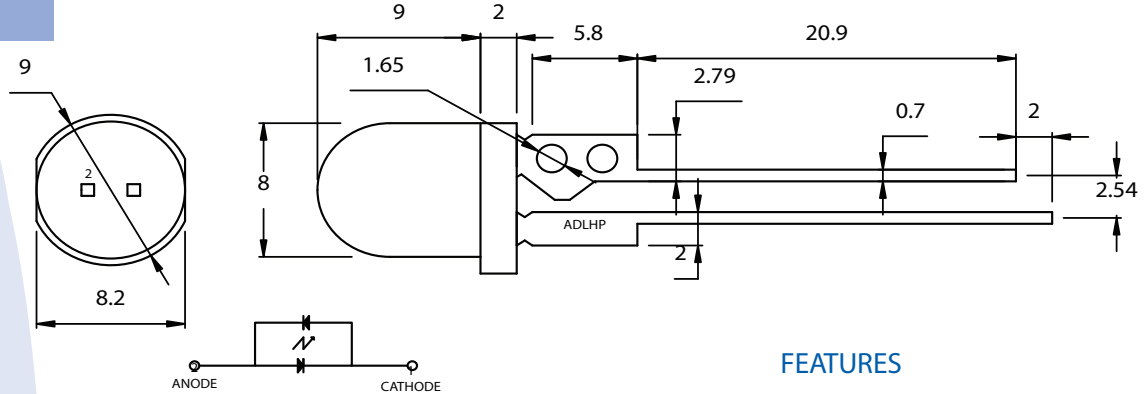

## FEATURES

- High Luminous intensity, with a longer operation life.
- Excellent consistency on color, intensity and Forward Current.
- Low voltage DC operated.
- Excellent Solderability and resistance to soldering heat.
- High Reliability, 100% Probing Test.
- Low thermal resistance

## ABSOLUTE MAXIMUM RATINGS

Items	Symbols	Ratings	Unit
Operation Forward Current	$I_f$	100	mA
Dominant wavelength	$\lambda_D$	n/a	nm
Operating Temperature Range	$T_{Op}$	-25 ~ 80	C
Power Dissipation	$P_D$	0.35	W
Reverse Current	$I_{rz}$	10	mA
Storage Temp. Range	$T_s$	-30 ~ 100	C
Soldering Temperature	$T_{sol}$	* 260	C

## ELECTRICAL-OPTICAL CHARACTERISTICS

Parameter	Symbol	Conditions	Min.	Typ.	Max.
Forward Voltage	$V_f$	$I_F=100mA$		3.4	
Reverse Current	$I_r$	$V_R=10V$			10
Luminous Intensity	$I_m$	$I_F=100mA$		17	

## SERIES STANDARD SPECIFICATIONS

Shape	Emitting Color	Part Number	Wavelength (nm)	Diffusion	IR( $\mu A$ ) VR=5V MAX	Luminous Intensity ( $I_m$ ) IF=100mA Typ	Emitting Material	Viewing Angle Q (deg.)
8 $\phi$	White	ADLHP0-8C200-M1-L	X=0.32, Y=0.34	W.C.	10	17	InGaN	30

## KELVIN RATINGS

Kelvin Rating	a	b	c	Unit
K	5000 - 6000	6000 - 7000	7000 - 8000	K

# Light Emitting Diodes

High Power

ADLHP Series



ADLHP0-83000-M1-L

WHITE

