

# Light Emitting Diodes

High Power LEDs

ADLHP Series




ADLHP7-8BC200-M1-M

## INTRODUCTION

BLUE

The Adiva High-Power LED has a wide range of applications and a uniquely designed shape and is encapsulated in water clear epoxy resin with an 8mm diameter.

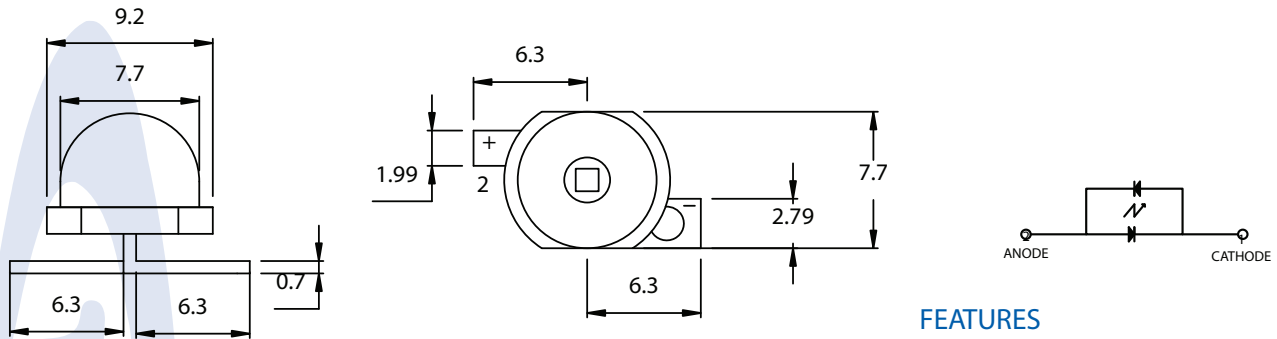

## ABSOLUTE MAXIMUM RATINGS

Items	Symbols	Ratings	Unit
Operation Forward Current	$I_f$	150	mA
Dominant wavelength	$\lambda_D$	460	nm
Operating Temperature Range	$T_{Op}$	-25 ~ 80	C
Power Dissipation	$P_D$	0.5	W
Reverse Current	$I_{rz}$	10	mA
Storage Temp. Range	$T_s$	-30 ~ 100	C
Soldering Temperature	$T_{sol}$	* 240	C

- ## FEATURES
- High Luminous intensity, with a longer operation life.
  - Excellent consistency on color, intensity and Forward Current.
  - Low voltage DC operated.
  - Excellent Solderability and resistance to soldering heat.
  - High Reliability, 100% Probing Test.
  - Low thermal resistance

## ELECTRICAL-OPTICAL CHARACTERISTICS

Parameter	Symbol	Test Condition	Min.	Typ.	Max.
Forward Voltage	$V_f$	$I_F=150mA$		3.5	
Reverse Current	$I_r$	$V_R=10V$			10
Luminous Intensity	$I_m$	$I_F=150mA$		4	

## SERIES STANDARD SPECIFICATIONS

Shape	Emitting Color	Part Number	Wavelength (nm)	Diffusion	IR( $\mu A$ ) VR=10V MAX	Luminous Intensity ( $I_m$ ) IF=150mA Typ	Emitting Material	Viewing Angle Q (deg.)
8 $\phi$	Blue	ADLHP7-8BC200-M1-M	520	W.C.	10	4	InGaIN	140

# Light Emitting Diodes






High Power

ADLHP Series



ADLHP7-8BC200-M1-M

BLUE

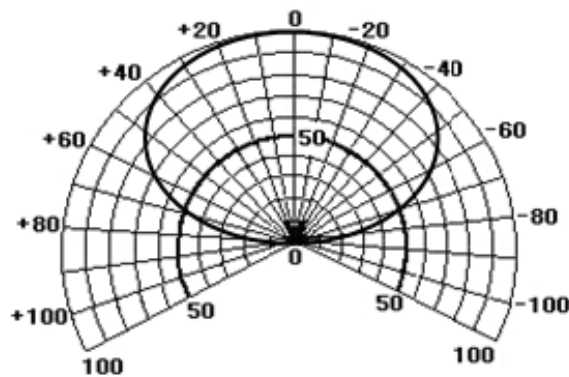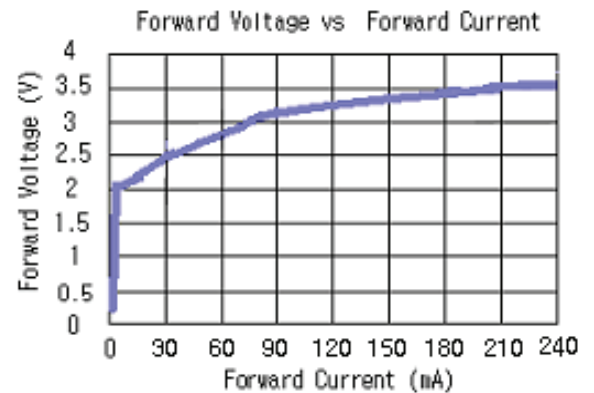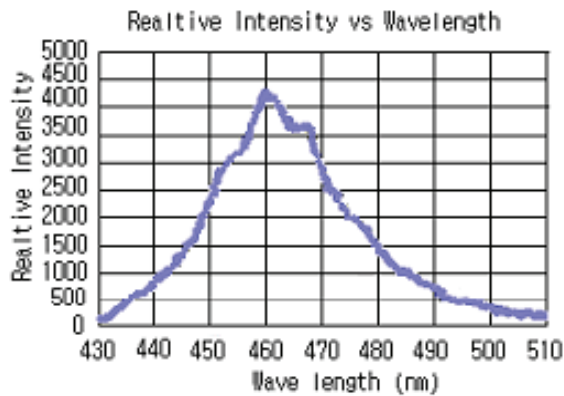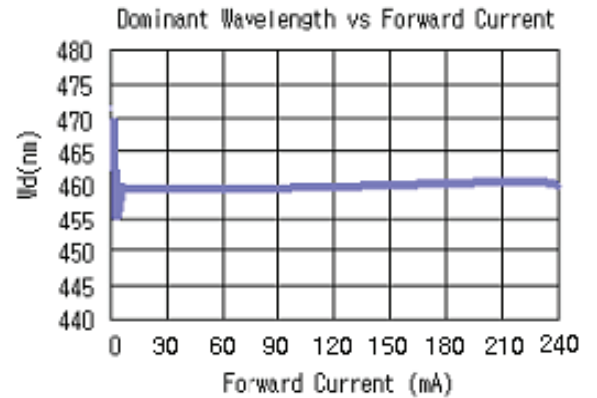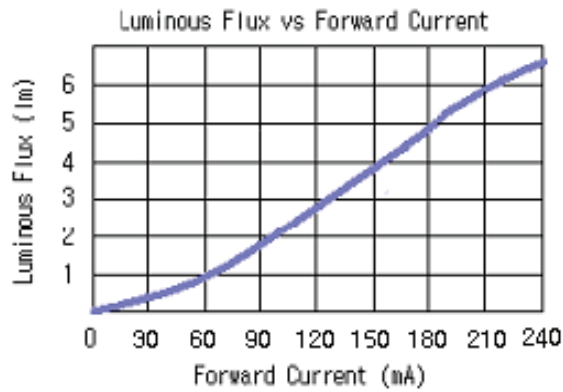

Directive Characteristics