7907 Series
D-SUB Solder Type

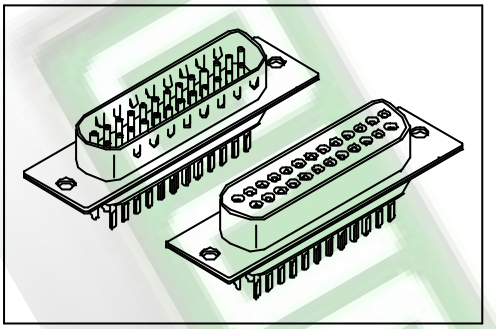

Material:
Housing: 30% Glass filled PBT UL94V-0.
Contacts: Brass.
Plating: Gold plated.

Electrical Characteristics:
Current Rating: 1 AMP.
Insulator Resistance: 5000MΩmin at DC 500V
Contact Resistance: 20mΩmax. at DC 100mA.
Operating Temperature: -55°C~+105°C.

Features:
* UL cUL Listing.

Mates with: 7902, 7906, 7926, 7936.

Female

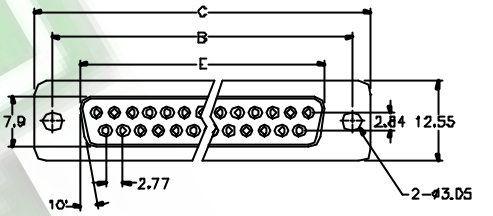

Male

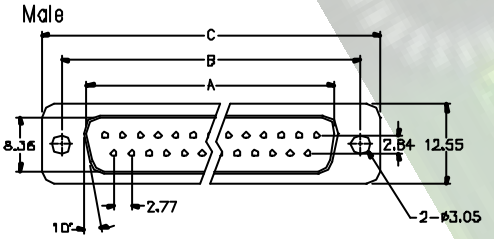

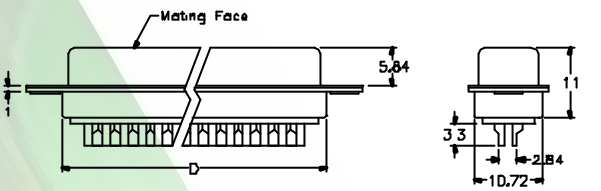

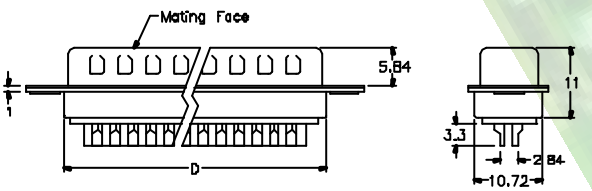

Position	Dimension				
	A	B	C	D	E
9	16.92	24.99	30.81	19.28	16.33
15	25.25	33.32	39.14	27.51	24.66
25	38.96	47.04	53.04	41.30	38.38
37	55.42	63.50	69.32	57.71	54.84
50	72.86	81.11	86.80	75.30	72.34

Ordering information

7907-	50	M	T	B	C	N1
Series	Position	M. Male F: Female	T: Tin Shell E: Zinc Shell	B. Black U: Blue W: White	C: Selective Gold Plated	Blank: Standard Type N1: See Page B52