


Part Number: MS22 10008

### Ordering Different Lead Types:

Inside Kinked Leads	Use <b>-A</b> after Ametherm's part #
Outside Kinked Leads	Use <b>-B</b> after Ametherm's part #

For example: to order an inside kinked lead use part number MS22 10008-A

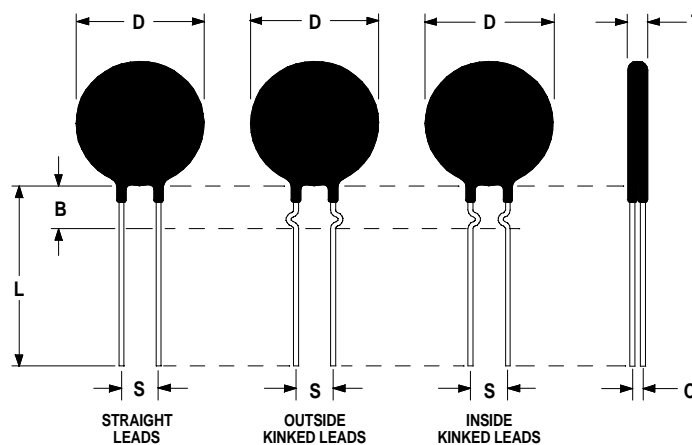

### Electrical Specifications:

Resistance @ 25°C	10.0 $\Omega$ $\pm$ 25%
Max Steady State Current Up to 65°C	8.0 A
Max Recommended Energy Rating (Joules)	200.0 J
Actual Failure Point of Instantaneous Energy (Joules)	450.0 J
Resistance @ 100% of Max Current	0.090 $\Omega$
Resistance @ 100% of Max Current	0.180 $\Omega$
Body Temperature @ 100% Current Rating	194 °C
Dissipation Constant	55.0 mW/°C
Thermal Time Constant	112 seconds
Beta	3000 °K
Maximum Capacitance @ 265 Vrms	2850 $\mu$ F

### Mechanical Specifications:

D	20.0 $\pm$ 1.0 mm
T	7.0 $\pm$ 0.7 mm
Lead Diameter	1.0 $\pm$ 0.1 mm
S	7.8 $\pm$ 2.0 mm
L	38.0 $\pm$ 9.0 mm
Straight Leads Coating Run Down	5.0 $\pm$ 1.0 mm
B	9.22 $\pm$ 0.85 mm
C	3.82 $\pm$ 1.0 mm

Revision Date: July 26, 2002

**Ametherm, Inc.** 3111 N. Deer Run Road #4 Carson City, NV 89701  
 Telephone: (800) 808-2434 (775) 884-2434 Fax: (775) 884-0670

[www.ametherm.com](http://www.ametherm.com)